


TSF Type

Cone Number	Cup Number	D _f	W _f	T
		Flange Diameter	Flange Width	Bearing Standout
Inch/mm				
336	332B	3.3330	0.1875	0.3125
		84.658	4.762	7.938
350A	354B	3.5299	0.1875	0.3125
		89.659	4.762	7.938
365	362B	3.7268	0.1875	0.3499
		94.661	4.762	8.887
385	385B	3.9960	0.1875	0.3125
		101.498	4.762	7.938
390	394AB	4.5147	0.1870	0.3120
		114.673	4.750	7.925
395CS	394AB	4.5147	0.1870	0.3690
		114.673	4.750	9.373
395ES	394AB	4.5147	0.1870	0.6520
		114.673	4.750	16.561
436	432B	3.9640	0.2188	0.4376
		100.686	5.558	11.115
455	453B	4.4640	0.2188	0.4376
		113.386	5.558	11.115
475	472B	4.9384	0.2180	0.4368
		125.435	5.537	11.095
495	493B	5.5890	0.2180	0.5305
		141.961	5.537	13.475
525	522B	4.2460	0.2500	0.5625
		107.848	6.350	14.288
537	532B	4.6210	0.2500	0.5625
		117.373	6.350	14.288
554	552B	5.1210	0.2500	0.5625
		130.073	6.350	14.288
554	553BA	5.2460	0.2500	0.2810
		133.248	6.350	7.137
565	563B	5.2460	0.2500	0.5625
		133.248	6.350	14.288
575	572B	5.7575	0.2500	0.5625
		146.240	6.350	14.288
590A	592B	6.2460	0.2500	0.6250
		158.648	6.350	15.875
615	612B	5.0272	0.2812	0.6562
		127.691	7.142	16.667
615	613B	5.0272	0.2500	0.5000
		127.691	6.350	12.700

Cone Number	Cup Number	D _f	W _f	T
		Flange Diameter	Flange Width	Bearing Standout
Inch/mm				
636	632B	5.6520	0.2810	0.6560
		143.561	7.137	16.662
655	652B	6.2772	0.2812	0.6562
		159.441	7.142	16.667
662	652B	6.2772	0.2812	0.5312
		159.441	7.142	13.492
677	672B	6.9030	0.2812	0.7187
		175.336	7.142	18.255
740	742B	6.2170	0.3125	0.6250
		157.912	7.938	15.875
755	752B	6.6830	0.3120	0.6870
		169.748	7.925	17.450
776	772B	7.4330	0.3125	0.6875
		188.798	7.938	17.462
795	792B	8.4336	0.3125	0.8125
		214.213	7.938	20.638
835	832B	6.9960	0.3750	0.8750
		177.698	9.525	22.225
855	854B	7.8710	0.3750	0.8750
		199.923	9.525	22.225
896	892B	9.3710	0.3750	0.8750
		238.023	9.525	22.225
936	932B	8.8085	0.4375	0.9375
		223.736	11.112	23.812
2984	2924B	3.5340	0.1875	0.3750
		89.764	4.762	9.525
3379	3320B	3.3396	0.1875	0.4063
		84.826	4.762	10.320
3476	3420B	3.3390	0.1875	0.4063
		84.049	4.762	10.320
3576	3525B	3.6215	0.1870	0.4370
		91.986	4.750	11.100
3767	3720B	3.8558	0.1875	0.4375
		97.937	4.762	11.112
3872	3820B	3.5270	0.1875	0.4375
		89.586	4.762	11.112
3975	3920B	4.6210	0.1875	0.4375
		117.373	4.762	11.112
■ JP6049	■ JP6010B	4.1339	0.1181	0.3346
		105.000	3.000	8.5001
6460	6420B	6.1835	0.3125	0.6875
		157.061	7.938	17.462
6559C	6535B	6.7500	0.3125	0.7500
		171.450	7.938	19.050
■ JP7049	■ JP7010B	4.5669	0.1181	0.3346
		116.000	3.000	8.500
■ JP8049	■ JP8010B	5.1969	0.1575	0.4134
		132.000	4.000	10.500
8573	8520B	13.2460	0.3750	1.0000
		336.448	9.525	25.400
9380	9321B	7.0620	0.3125	1.0000
		179.375	7.938	25.400
■ JP10044	■ JP10010B	5.9843	0.1575	0.4134
		152.000	4.000	10.500
11162	1130B	3.1836	0.1406	0.2871
		80.863	3.571	7.292
■ JP13049	■ JP13010B	7.5591	0.1969	0.5118
		192.000	5.000	13.000

■ For parts with a "J" prefix, use metric tolerances given on page 213 and fitting practice given on page 215.

Tapered Roller Bearings

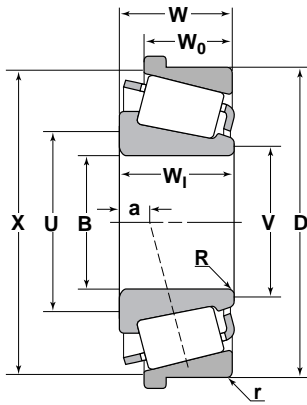


TSF Type

Cone Number	Cup Number	D _f	W _f	T
		Flange Diameter	Flange Width	Bearing Standout
Inch/mm				
■ JP13049	■ JP13010B	7.5591	0.1969	0.5118
		192.000	5.000	13.000
■ JP14049	■ JP14010B	7.9528	0.1969	0.5118
		202.000	5.000	13.000
■ JP18049	■ JP18010B	9.7638	0.2362	0.5906
		248.000	6.000	15.000
18685	18620B	3.3086	0.1406	0.2968
		84.038	3.571	7.539
18790	18720B	3.4870	0.1406	0.2968
		88.570	3.571	7.539
25570	25521B	3.4220	0.1563	0.3438
		86.919	3.970	8.733
26877	26822B	3.2772	0.1563	0.3438
		83.241	3.970	8.733
27684	27620B	5.1211	0.1875	0.4062
		130.076	4.762	10.317
28150	28315B	3.3015	0.1563	0.3583
		83.858	3.970	9.101
28579	28512B	3.7772	0.1562	0.3437
		95.941	3.967	8.730
28678	28622B	3.9960	0.1560	0.3592
		101.498	3.962	9.124
28985	28921B	4.0930	0.1563	0.3750
		103.962	3.970	9.525
28990	28921B	4.0930	0.1563	0.3438
		103.962	3.970	8.733
29580	29520B	4.4022	0.1563	0.4063
		111.816	3.970	10.320
29580	29521B	4.4803	0.1563	0.4063
		113.800	3.970	10.320
29675	29620B	4.5900	0.1563	0.4063
		116.586	3.970	10.320
31590	31520B	3.1836	0.1875	0.4063
		80.863	4.762	10.320
33225	33462B	4.8084	0.1875	0.4375
		122.133	4.762	11.112
33880	33820B	3.8558	0.1875	0.4063
		97.937	4.762	10.320
34274	34478B	4.9648	0.1875	0.4688
		126.106	4.762	11.908

Cone Number	Cup Number	D _f	W _f	T
		Flange Diameter	Flange Width	Bearing Standout
Inch/mm				
36690	36620B	7.7772	0.1563	0.3750
		197.541	3.970	9.525
37425	37625B	6.4336	0.1875	0.4688
		163.413	4.762	11.908
39250	39412B	4.3084	0.1875	0.4063
		109.433	4.762	10.320
39573	39520B	4.6523	0.2188	0.4688
		118.168	5.558	11.908
42346	42587B	6.0898	0.2188	0.5000
		154.681	5.558	12.700
42687	42620B	5.2460	0.2188	0.5313
		133.248	5.558	13.495
43112	43312B	3.3390	0.2188	0.5313
		84.811	5.558	13.495
43131	44348B	3.6983	0.2187	0.5312
		93.937	5.555	13.492
46780	46720B	9.0898	0.2188	0.5313
		230.881	5.558	13.495
47685	47620B	5.4650	0.2188	0.5000
		138.811	5.558	12.700
47890	47825B	5.8710	0.3125	0.5937
		149.123	7.938	15.080
48286	48220B	7.4335	0.2500	0.5000
		188.811	6.350	12.700
48385	48320B	7.7148	0.2188	0.4688
		195.956	5.558	11.908
48684	48620B	8.0898	0.2187	0.5000
		205.481	5.555	12.700
49576	49520B	4.2148	0.2188	0.4688
		107.056	5.558	11.908
52375	52637B	6.6210	0.2500	0.6562
		168.173	6.350	16.667
53150	53387B	4.1210	0.2500	0.6563
		104.673	6.350	16.670
55175C	55437B	4.5938	0.2188	0.5938
		116.683	5.558	15.083
56418	56650B	6.7460	0.2500	0.6250
		171.348	6.350	15.875
64432	64700B	7.2772	0.2813	0.7188
		184.841	7.145	18.258
65385	65320B	4.7772	0.2813	0.6563
		121.341	7.145	16.670
65200	65500B	5.2772	0.2813	0.6563
		134.041	7.145	16.670
66200	66462B	4.8750	0.2500	0.6250
		123.825	6.350	15.875
67388	67320B	8.2772	0.2813	0.5938
		210.241	7.145	15.083
67388	67322B	8.0272	0.2813	0.5938
		203.891	7.145	15.083
67780	67720B	10.0272	0.2813	0.6563
		254.691	7.145	16.670
67883	67820B	10.7772	0.2813	0.6563
		273.741	7.145	16.670
67983	67920B	11.4022	0.2813	0.6563
		289.616	7.145	16.670
68450	68712B	7.4022	0.2813	0.6563
		188.016	7.145	16.670

■ For parts with a "J" prefix, use metric tolerances given on page 213 and fitting practice given on page 215.

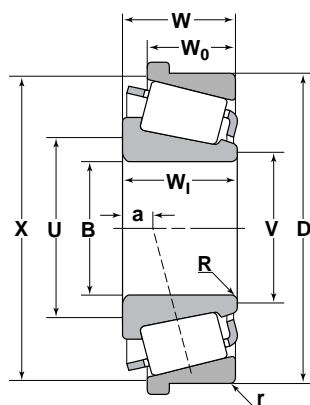

TSF Type

Cone Number	Cup Number	D _f	W _f	T
		Flange Diameter	Flange Width	Bearing Standout
Inch/mm				
71412	71750B	7.8080	0.3125	0.8125
		198.323	7.938	20.638
74500	74850B	8.8084	0.3125	0.8125
		223.733	7.938	20.638
77350	77675B	7.0584	0.3125	0.6875
		179.283	7.938	17.462
82550	82950B	9.8710	0.3750	0.8750
		250.723	9.525	22.225
86650	86100B	10.3750	0.3750	0.8750
		263.525	9.525	22.225
87737	87111B	11.4960	0.3750	0.9375
		292.000	9.525	23.812
93708	93125B	12.9340	0.4375	1.1250
		328.524	11.112	28.575
94649	94113B	11.8084	0.4375	1.0625
		299.933	11.112	26.988
95475	95925B	9.6834	0.4375	1.0000
		245.958	11.112	25.400
96900	96140B	14.4340	0.4375	1.2500
		366.624	11.112	31.750
98316	98788B	8.2500	0.3750	1.0772
		209.550	9.525	27.361
99550	99100B	10.4320	0.4375	1.1875
		264.973	11.112	30.162
L116149	L116110B	4.7187	0.1563	0.3125
		119.855	3.970	7.938
EE128111	128160B	16.4960	0.5000	1.1250
		418.998	12.700	28.575
EE203136	203190B	19.5586	0.5625	1.4375
		496.788	14.288	36.512
HH221430	HH221410B	7.8710	0.4375	0.8750
		199.923	11.112	22.225
HM231140	HM231115B	9.8710	0.3750	0.8750
		250.723	9.525	22.225
EE231400	232000B	20.5586	0.5625	1.5000
		522.188	14.288	38.100
HM237532	HM237510B	11.8084	0.4375	1.0625
		299.933	11.112	26.988
M249732	M249710B	14.6250	0.5000	1.1875
		371.475	12.700	30.162

Cone Number	Cup Number	D _f	W _f	T
		Flange Diameter	Flange Width	Bearing Standout
Inch/mm				
EE275095	275158B	16.4334	0.5625	1.5000
		417.408	14.288	38.100
EE291175	291750B	17.9960	0.5000	1.4375
		457.098	12.700	36.512
L305649	L305610B	3.3085	0.1250	0.2813
		84.036	3.175	7.145
L327249	L327210B	7.1210	0.1562	0.3437
		180.873	3.967	8.730
L357049	L357019B	16.5324	0.3750	0.8750
		419.923	9.525	22.225
H414235	H414210B	5.6550	0.12800	0.6550
		143.637	7.112	16.637
L433749	L433710B	8.7500	0.1875	0.4063
		222.250	4.762	10.320
LM451345	LM451310B	14.3750	0.3750	0.8750
		365.125	9.525	22.225
L467549	L467510B	20.4336	0.4375	1.0000
		519.013	11.112	25.400
L507949	L507910B	3.5625	0.1250	0.2813
		90.488	3.175	7.145
HM516442	HM516414B	5.6875	0.2038	0.4850
		144.462	5.177	12.319
EE526130	526190B	19.6210	0.6250	1.6250
		498.373	15.875	41.275
LM613449	LM613410B	4.6875	0.1875	0.4375
		119.062	4.762	11.112
L624549	L624510B	6.4647	0.1563	0.3438
		164.203	3.970	8.733
■ JM624649	■ JM624610B	7.4016	0.2500	0.6437
		188.000	6.350	16.350
L630349	L630310B	7.7705	0.1562	0.3925
		197.371	3.967	9.970
LM654642	LM654610B	15.3710	0.3750	1.0000
		390.423	9.525	25.400
H715332	H715310B	6.0000	0.3125	0.6875
		152.400	7.938	17.462
■ JM716648	■ JM716610B	5.3346	0.2188	0.4550
		135.500	5.558	11.557
■ JLM722948	■ JLM722912B	6.7717	0.2165	0.4921
		172.000	5.500	12.500
■ JL724348	■ JL724314B	6.9685	0.1969	0.4469
		177.000	5.000	11.350
■ JL730646	■ JL730612B	8.2677	0.1914	0.4724
		210.000	4.862	12.000
LM742745	LM742710B	11.5624	0.3125	0.7500
		293.685	7.938	19.050
LM757049	LM757010B	16.5000	0.3750	1.0000
		419.100	9.525	25.400
LM814849	LM814810B	4.8084	0.1875	0.4375
		122.133	4.762	11.112
L853049	L853011B	14.0925	0.2362	0.7362
		357.950	6.000	18.699
L865547	L865512B	19.2810	0.3750	0.9375
		489.737	9.525	23.812

■ For parts with a "J" prefix, use metric tolerances given on page 213 and fitting practice given on page 215.